
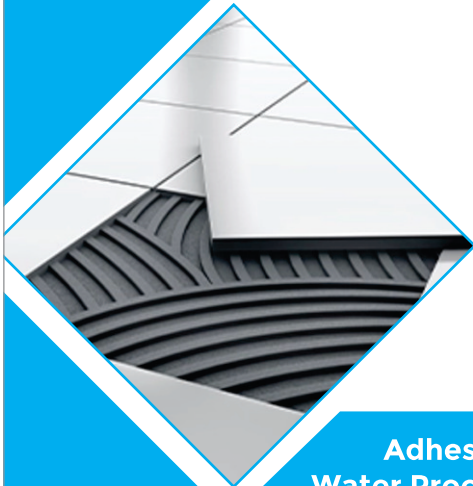


MEPL[®]

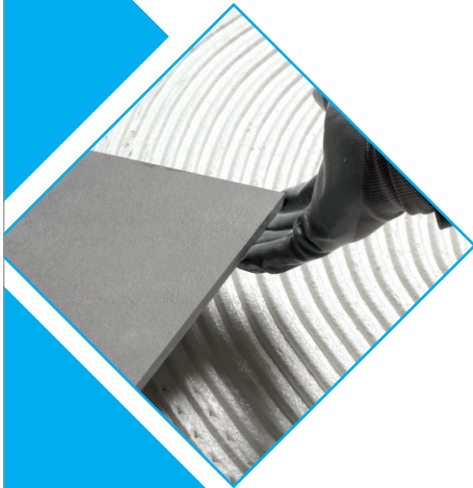

Adhesives | Epoxy Grouts
Water Proofing | Wall Putty | Paints

TILE ADHESIVE (335 SUPER FLEX)

Description: premium adhesive for floor & wall. Highly polymer modified and highly flexible adhesive for installation of large format / slim tiles & stones on interior and exterior floor & wall.

APPLICATION : Specially designed for interior and exterior floor and wall installation of all types of ceramic, vitrified tiles & natural stones.

PACKING : 20 kg bag.

COVERAGE : Approximately 50 to 55 sq.ft. per 20 kg bag at 6mm thickness.

COLOUR : White / Grey

NOTE : Coverage is based on smoothness and evenness of the substrate.

For improved performance mixed with **BOND LATEX**.



TILE ADHESIVE (325 HIGH FLEX)

DESCRIPTION : High polymer modified adhesive for floor & wall in interior and exterior areas to install various types of medium & large format tiles & stones on a variety of substrates.

APPLICATION : Specially designed for interior and exterior floor and wall installation of all types of ceramic, vitrified tiles & natural stones.

PACKING : 20 kg bag.

COVERAGE : Approximately 50 to 55 sq.ft. per 20 kg bag at 6mm thickness.

COLOUR : White / Grey

NOTE : Coverage is based on smoothness and evenness of the substrate.

For improved performance mixed with **BOND LATEX**.



TILE ADHESIVE (315)

DESCRIPTION : It is multi purpose, polymer based thin set powder offering vast utility including application for floor & wall in interior and exterior area. installation of ceramic & vitrified tiles.

APPLICATION : Desinged specially for interior and exterior floor & walls installations of all type of ceramic & vertified tiles.

PACKING : 20kg Bag.

COVERAGE : Approximately 50 to 55 sq.ft. per 20 kg bag at 6mm thickness.

COLOUR : Grey

NOTE : Coverage is based on smoothness and evenness of the substrate.

For improved performance mixed with **BOND LATEX**.



TILE ADHESIVE (305)

Description: It is a single component economical & easy to use thin set adhesive for installing small and medium size ceramic floor tiles in interior areas.

Application: design for interior floor applications.

PACKING : 20 kg Bag.

COVERAGE : Approximately 50 to 55 sq.ft. per 20 kg bag at 6mm thickness.

COLOUR : Grey

NOTE : Coverage is based on smoothness and evenness of the substrate.

For improved performance mixed with **BOND LATEX**.



AAC BLOCK ADHESIVE

DESCRIPTION : AAC Block Jointing Adhesive is a ready to mix, self-curing cementitious mortar for laying of AAC, CLC, Hollow concrete blocks and bricks.

APPLICATION : Concrete blocks, cement mortar blocks, bricks, concrete hollow blocks, aerated light weight blocks and fly ash bricks.

PACKAGING : 40 kg bag. | **COLOUR :** Grey

COVERAGE : Approximately 220 to 240 sq ft per 40kg bag when used at 2mm bed thickness.

NOTE : Coverage is based on smoothness and evenness of the substrate depend upon size of the block.

For improved performance mixed with **BOND LATEX**.



BOND LATEX (SBR Latex for Repairs & Waterproofing)

DESCRIPTION : Bond Latex is based on modified styrene butadiene latex. It is used for high performance application in water proofing and repairs it provides excellent bonding strength to concrete masonry stone work plaster & most of the building materials.

APPLICATION : Bond coating plaster to plaster, concrete to concrete, plaster to concrete, masonry to stone work and for palstering over brick masonry bonding coat and mortar for tiles and panels.

PACKAGING : 1 & 5 kg.



TILE GROUT EPOXY (EP-100)

DESCRIPTION : EP-100 Epoxy grout is stain free grout for floor and walls, colour fast, chemical resistance, 100% solid epoxy grout. Suitable for ceramic, vitrified tiles, marble and natural stones.

APPLICATION :

- Especially in stain prone areas, such as kitchens.
- Washrooms.
- Residential and commercial installations.
- Swimming pools.
- Fountains.
- Water bodies.
- Restaurants.
- Hospitals, etc.

COVERAGE : Varies with tile size and grout width.

PACKING : 1 kg & 5 kg.

COLOUR : Available in a range of more than 20 colours.

Factory proportioned unit consisting of three conveniently packed components.

Hardener, resin and coloured filler powder.



TILE GROUT (UNSANDED)

DESCRIPTION : A carefully prepared blend of portland cement, graded aggregates, polymer based and colour - fast pigments. It is designed for joint width 1mm to 3mm width. For improved performance mixed with [GROUT AD-MIX](#).

APPLICATION : Designed for joint filling width 1mm to 3mm. Specially for floor & walls of all type of ceramic, vitrified tiles, natural stones, granite stone.

PACKING : 1 kg.

COLOUR : Available in range of more than 20 colours.



GROUT AD MIX

DESCRIPTION : GROUT AD-MIX is specially designed latex to Use in place of water, to improves the performance of Portland cement grouts.

APPLICATION: Designed for interior and exterior floor and wall joints of all types of ceramic tile, vitrified tiles and natural stone installation.

PACKING: 200 ML



TAP & SHOWER CLEANER

Description: Tap & shower cleaner is specially designed to remove stubborn soap scum, hard water & lime scale stains. From c/pfitting and sanitary ware.

Application: c/pfitting and sanitary ware.

Packing: 500 ML



TILE & CERAMIC CLEANER

Description : Tile & ceramic cleaner is a fast acting acid based cleaner for regular cleaning of tile and ceramic surfaces. It is designed for daily maintenance.

Application : tile & ceramic surface only

Packing : 500 ML



TILE GROUT & EPOXY GROUT COLOUR SHADES

	901 Bright White		908 Midnight Black		915 Sierra Sunrise
	902 Quarry Red		909 Blue		916 Slate Grey
	903 Almond		910 Alpine Blue		917 Terracotta
	904 Coffee		911 Light Green		918 Pink
	905 Dark Green		912 Cream		919 Yellow
	906 Smoke Grey		913 Brown		920 Ivory
	907 Marble Beige		914 Chocolate		921 Sky Blue

• All Shades shown above are for indicative purpose and guidance only. • Verify actual appearance and compatibility with a test area before installation commences. • Actual shades and texture will depend on job site conditions. • Actual colour may vary, this is due to the fact that every computer monitor has a different capability to display colours.



Lecco Paints

Let your Painting Journey begin.

WATERPROOF PUTTY

Description: water proof putty is a white cement based putty with 2X water resistance and active german silicon polymers. Which provides a strong adhesion base on a plaster , concrete and mortor wall surface before application of topcoat paint. Protect your wall from water.

Application: exterior & interior walls

Packing: 30 kg bag.

Coverage: approximately covers 12-15 sft per kg. For two coats for maximum thickness of 1.5 mm. on smooth plaster surface.

Note: coverage is based on smoothness and evenness of the substrate. However , this may change according to surface texture.



WALL PUTTY

Description: wall putty is a powder based unique mixture of superfine white cement blended with special polymer and many other additives. It is used for both exterior & interior wall to give a smooth finish.

Application: exterior & interior walls

Packing: 40 kg bag.

Coverage: approximately covers 12-15 sft per kg. For two coats for maximum thickness of 1.5 mm. on smooth plaster surface.

Note: coverage is based on smoothness and evenness of the substrate. However , this may change according to surface texture.



DAMP PROOF

CLASSIC

Description: lecco paints dam proof classic is a fiber reinforced elastomeric liquid applied waterproofing membrane. It is formulated with selected elastomeric and resilient acrylic polymers and reinforcing polyester fibers. It provides ultimate waterproofing solution.

Application: exterior, interior walls & Terrace.

Packing: 1, 4, 10 & 20 L



Imperial

wallprimer

Description: Lecco Paints primer is specially formulated to provide excellent adhesion. Suitable for application on exterior & interior walls. As an under coat primer for emulsions.

Application: exterior & interior walls

Packing: 1, 4, 10 & 20 L



CLASSIC

**PREMIUM EMULSION
FOR EXTERIOR**

Description: leccopaints exterior emulsion is a high quality paint that offers excellent adhesion, coverage and durable finish. It is formulated with a unique water resistant technology.

Application: exterior & interior walls

Packing: 1, 4, 10 & 20 L



ULTRA

**PREMIUM EMULSION
FOR INTERIOR**

Description: lecco paints interior emulsion is a high quality paint that offers excellent adhesion, coverage and durable finish. This paint provides a smooth and matt finish to your walls.

Application: interior walls

Packing: 1, 4, 10 & 20 L





Disclaimer : The product Information and application details given by the company and its representatives only as a general guide lines during usage. Users are advised to carry out tests & trials to ensure their product requirements prior to full scale usage of our product. We do not accept the responsibility for the misuse of our products. Various factors like temperature, weather, amount of water, skill of applicator used contribute to the performance of the product over which we have no control. We assure no warranty for finished work.



MEPL®

Mayureshwar Enterprises Private Limited

Regd Office: Shop B4, Balaji Complex,
Syno. 663, Shamshabad, Ranga Reddy Dist,
Telangana-501218

Phone No. : 9505099930

Website :

www.leccopaints.com

www.meplchemicals.com

Email :

leccopaints@gmail.com

meplchemicals@gmail.com




Lecco Paints